




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>G06T 15/10</b>	<b>A1</b>	(11) International Publication Number: <b>WO 99/03068</b> (43) International Publication Date: 21 January 1999 (21.01.99)
(21) International Application Number: PCT/US98/12119 (22) International Filing Date: 10 June 1998 (10.06.98) (30) Priority Data: 08/889,713                      7 July 1997 (07.07.97)                      US (71) Applicant: REVEO, INC. [US/US]; 8 Skyline Drive, Hawthorne, NY 10532 (US). (72) Inventors: MA, Kelvin; 1014 Foxwood Drive, Clifton Park, NY 12065 (US). SWIFT, David; 16 Brookville Avenue, Ossining, NY 10562 (US). (74) Agents: CARDWELL, Douglas, A. et al.; Fish & Neave, 1251 Avenue of the Americas, New York, NY 10020 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  Published With international search report.

(54) Title: METHOD AND APPARATUS FOR MONOSCOPIC TO STEREOSCOPIC IMAGE CONVERSION

## (57) Abstract

A method and apparatus for converting a monoscopic image with one perspective to a stereoscopic image with two perspectives is provided. A foreground object is identified and outlined. The depth of the object is endowed with depth information. The second perspective is generated by image warping. Alternate embodiments comprising additional features, such as removing redundant frames, which reduce the necessary computation are also provided.

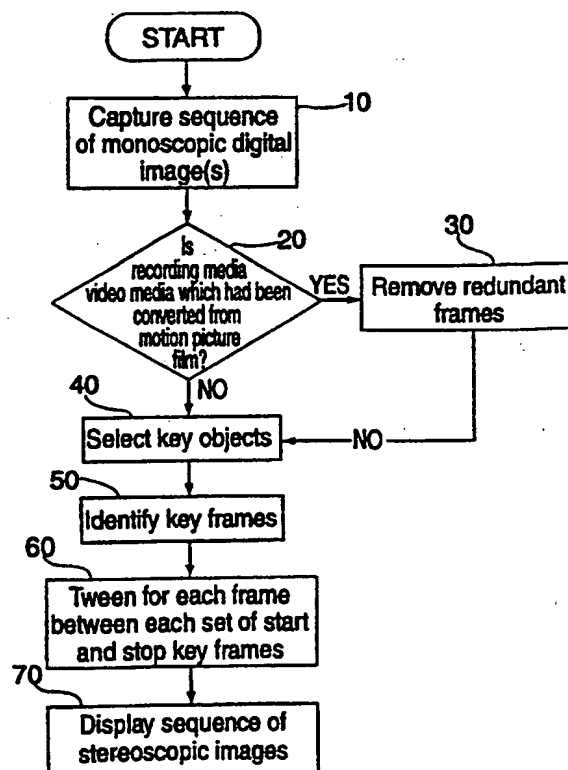

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

METHOD AND APPARATUS FOR MONOSCOPIC  
TO STEREOSCOPIC IMAGE CONVERSION

Background of the Invention

This invention relates to a method and an  
5 apparatus for converting monoscopic (i.e., two-  
dimensional) images into stereoscopic (i.e., three-  
dimensional) images, and more particularly using image  
warping.

The human brain perceives depth by receiving two  
10 different images, which are horizontally shifted relative  
to each other, from each eye. Such depth information is  
important for determining how far away an object is and  
the depth arrangements between various objects in a scene.  
Unfortunately, most images are recorded in monoscopic  
15 format on recording medium (e.g., motion picture film and  
video media) where some depth information is lost.  
However, even a monoscopic camera lens produces an image  
according to the laws of Cartesian space and perspective.  
If such an image could be processed to extract that  
20 information, and thus be converted into three-dimensional  
stereoscopic format, there could be a vast amount of  
stereoscopic material available for three-dimensional  
viewing.

- 2 -

There are several methods to generate stereoscopic images from monoscopic images. One method, the horizontal shift method, isolates several important objects in the image field and shifts them horizontally.

5 B.J. Garcia, Ph.D. and R.J. Greenstein, M.D., "True-Stereoscopic Video Media from Monoscopic Sources: The DeepVision System for Minimally Invasive Surgery," *Medical Applications, Virtual Reality Systems*, pp. 52-57 (1994). The amount of the shift for each object varies according

10 to its depth arrangement. The depth arrangement (also referred to as stereoscopic depth cue or binocular disparity) of an object can be set manually using cues such as shadows and the perspective within the monoscopic image. This process creates a stereoscopic image with

15 depth perception between objects, but the objects themselves lack depth and appear to be flat cardboard cutouts.

Another method, the frame delay method, uses moving images to extract a second perspective. H. Murata,

20 T. Okino, T. Iinuma, S. Yamashita, S. Tanase, K. Terada and K. Kanatani, "Conversion of Two-Dimensional Images to Three Dimensions," *SID 95 Digest, Society for Information Display 1995 Symposium Proceedings* (1995). When an object is in motion, a series of different perspectives is

25 generated due to either the object's movement or the camera's motion. Different perspectives from different images in a time series can then be extracted to generate a second perspective for the stereoscopic effect. Though this technique can create very realistic three-dimensional

30 effects, it requires that motion of both the camera and the objects be limited to a direction horizontal to the

- 3 -

image frame's horizontal axis. The camera must move in a horizontal fashion perpendicular to the subject matter (this is called a "truck" in the motion picture industry). The reason for this perpendicular motion is that each  
5 stereoscopic image pair is formed by pairing up images which are delayed from each other. Because the camera is limited to sideways motion, the delay between images results in a parallel camera separation. If the camera were not moving in a perpendicular and horizontal manner,  
10 the image pairs would not be parallel and would not form a good stereoscopic image. Also, since this technique requires a series of images taken at different times, a single image cannot be converted.

In view of the foregoing, it would be desirable  
15 to be able to provide a method and an apparatus for converting monoscopic images into stereoscopic images which gives the appearance of depth to objects themselves, as well as the appearance of depth between objects. It would also be desirable to be able to convert images with  
20 vertical as well as horizontal object motion relative to the frame's horizontal axis. It would also be desirable to be able to convert a single image.

#### Summary of the Invention

It is an object of the present invention to  
25 provide a method and an apparatus for converting monoscopic images into stereoscopic images which gives the appearance of depth to objects themselves, as well as the appearance of depth between objects.

It is also an object of the present invention to  
30 provide a method and an apparatus for converting images

- 4 -

with vertical as well as horizontal object motion relative to the frame's horizontal axis.

It is another object of the present invention to provide a method and an apparatus for converting a single  
5 image.

These and other objects of the invention are accomplished in accordance with the principles of the invention by identifying at least one object in the monoscopic image with a first perspective, outlining the  
10 object to generate an outline, endowing the object with depth information and generating a second perspective by image warping the object.

Possible applications for such a method and apparatus include rapid conversion of existing monoscopic  
15 movie and video media, as well as still photograph (i.e., single image), libraries to stereoscopic images.

#### Brief Description of the Drawings

The above and other objects and advantages of the invention will be apparent upon consideration of the  
20 following detailed description, taken in conjunction with the accompanying drawings, in which the reference characters refer to like parts throughout and in which:

FIG. 1 illustrates a system for converting monoscopic images to stereoscopic images;

25 FIG. 2 is an actual perspective calculation curve;

FIG. 3 illustrates a second perspective image geometry;

FIG. 4 illustrates a sequence of successive  
30 image frames and the image frame horizontal axis;

FIGS. 5a and 5b show pixel sampling;

- 5 -

FIG. 6 is a modified (saturating) perspective calculation curve;

FIGS. 7a and 7b illustrate the transformation of a cube;

5 FIG. 8 illustrates vector clipping;

FIG. 9a is a flow diagram of a preferred embodiment of the method implemented by the apparatus; and

FIG. 9b is a flow diagram of the tweening process used in the method shown in FIG. 9a.

10 The Appendix contains a listing of the symbolic mathematical program used to derive a generalized equation for shift.

#### Detailed Description of the Invention

The present invention is a method and an  
15 apparatus for converting monoscopic images to stereoscopic images.

Stereoscopic images require two slightly offset perspective images in order to create a stereoscopic presentation with the appearance of depth. Most existing  
20 images stored in motion picture film, photographic or video media format contain only a single perspective and, therefore, appear flat. In order to create a three-dimensional image, a second perspective image must be obtained.

25 The second perspective image is preferably only slightly offset from the first perspective image. In accordance with the present invention, it is possible to generate the second perspective image from the first image. A system of techniques of shifting and warping  
30 objects within the first image can be implemented to automate the generation of the second perspective image.

- 6 -

The technique of the present invention for converting monoscopic into stereoscopic images uses image warping techniques often used for morphing image objects from one shape into a different shape. Warping comprises two steps. First, the object's outlined shape is transformed into a new shape. This transformation preferably is primarily done by pixel interpolation. The interpolation can be either linear (for speed) or quadratic (for accuracy). Second, the pixels within the outlined shape of the image are interpolated where the boundary of the image outline expands or contracts. For stereoscopic image conversion, only pixel interpolation horizontal to the image frame axis (indicated by x in FIG. 4) is required, since the second perspective image is a slight horizontal shift from the first perspective image. This simplifies the procedure of image warping and helps speed up the transformation calculations. Indeed, a simple horizontal linear pixel interpolation can be achieved in close to real-time.

Objects are the components of an image which are manipulated to give the image depth. Examples of objects are tables, chairs, walls, floors, lights, people, etc. Objects can further be divided into sub-objects to add more depth. For example, a person could be broken into two arm objects, a head object, a body object, and two leg objects.

A frame is a single image at a specific time. NTSC video consists of 30 frames per second or 30 images per second. Sequential frames are the sequential images to be converted.

A key frame is a specific frame or image where input from the user is required to help direct the



- 7 -

animation. The start and end of a new scene are key frames. Frames where objects start or stop motion are typically key frames.

Key objects are the important objects in the  
5 image which will be processed using this invention.

Clipping occurs when one object (the foreground object) obscures another object (the background object). The portions of the background object which are obscured are removed or not displayed and the foreground object is  
10 displayed instead.

To convert a series of moving images, a "tweening" process preferably is implemented to automate the outlining process. The tweening process involves interpolations of the vector outlined shape of all the  
15 outlined objects within the scene from one key frame ("the start key frame") to the next key frame ("the stop key frame"). The interpolation can be either linear or non-linear (e.g., spline) depending on accuracy and/or speed requirements. Only the end points (i.e., the key frames)  
20 of the motion path for the objects need to be defined, significantly reducing the burden on the operator.

In order to apply image warping to the stereoscopic conversion of moving images such as those recorded on motion picture film or video media, two sets  
25 of outlined objects are used to enable clipping. A first set of outlines is provided either by an automatic image recognition process and/or manually by an operator to outline vectors on all the necessary key objects within an image. This set of outlines is then shifted and warped  
30 through the perspective transformation based on the depth arrangement of the objects provided by the operator. When objects are outlined, a set of vectors are used to

- 8 -

represent this. When vectors (outlines) from two objects intersect, vector-crossovers are created. The background vectors should be clipped to conform to the foreground vectors when this happens. Vector cross-overs can result  
5 in undesirable effects, therefore, a second set of outlined objects is generated after the perspective transformation.

As shown in FIG. 3, if the coordinates of an object in the left perspective image are crossed with  
10 corresponding coordinates in the right perspective image (i.e., each left coordinate is moved to the right of the corresponding right coordinate), the result is negative parallax and the object appears to protrude toward the observer and away from the neutral plane. Conversely, if  
15 the coordinates are uncrossed (each right coordinate is moved to the left of the corresponding left coordinate), the result is positive parallax and the object appears to recede.

Whenever the foreground objects' vectors cross-  
20 over the background objects due to the transformation, the background object's vectors preferably are clipped to the edge of the foreground object's outline. This prevents any vector cross-over during the actual warping process which could cause unwanted warping artifacts. The entire  
25 process can be completely automated using conventional computer line clipping algorithms. Given two sets of vectors with one tagged as the foreground and one tagged as the background, it is well known by someone skilled in the art how to automatically clip the background vectors  
30 to the foreground. Algorithms like this are used for hidden line removal in computer graphics.

- 9 -

FIG. 1 shows two-dimensional video media images comprising unprocessed still frames 2 provided to workstation 3 through digital image capture using video media frame grabber 1. Processed still frames 4 are  
5 displayed in sequence on monitor 5.

Key objects are operator-selected foreground objects in a particular sequence of images. Key frames, which correspond to frames in which key objects change motion or deviate from a predicted motion path, can be  
10 identified automatically by delta pixel changes between frames. Delta pixel changes can also be used to determine the basic motion path within each scene. The key frames can be automatically selected based on the extreme points of the motion path. The key frames can also be selected  
15 by a human operator after viewing the scene. These key frames are then individually processed by outlining the key objects within the image.

Objects can be detected automatically by an edge detection algorithm or manually by an operator. Automatic  
20 edge detection algorithms such as Laplacian, Sobel and Prewitt convoluted filters can be used to highlight the object's outline. Such algorithms are described, for example, in Christopher Watkins, Alberto Sadun, Stephen Marenka, "Modern Image Processing: Warping, Morphing, and  
25 Classical Techniques," Academic Press Professional, Inc. (1993). The computer can then trace around the highlighted objects to form vector outlines. A vector is a line which connects points (i.e., the control points) on the object.

30 Once vector outlines are determined for objects within the image, the foreground priority of objects can be determined by first identifying objects which are

- 10 -

enclosed within another object or objects which overlap another object. These objects are considered to be potential foreground objects and subject to further criteria such as intensity cue and vertical position cue.

5           Key objects can be identified by the operator as corresponding to certain predefined objects for predefined profile warping. Each predefined object preferably has a profile identification which defines its perceived surface profile. This predefined profile warping eliminates the  
10   need to define vectors within an object in order to recreate its full volume appearance.

          The object's outline defines the area which will be transformed via perspective warping. Perspective warping is a type of image warping in which the image is  
15   horizontally shifted. Therefore, the actual transformation is significantly faster to compute because there is no vertical warping.

          The object's outline is warped and the object's image within the outlined area is then warped into the  
20   necessary perspective. The control points of the outline are transformed into their new shape and position based on the depth arrangements and/or the object's profile identification. The actual transformation only shifts the end points of the vectors horizontally.

25           The amount of the shift may be based, for example, on the computed depth as shown in FIG. 2, which shows the relationship between the distance from the eyes,  $y$ , versus the amount of relative shift,  $\Delta$ , at any horizontal point  $x$  for a fixed focus distance of 45 inches  
30   and an eye separation distance of 3 inches. One should note that this position offset distance saturates rapidly as the depth becomes farther away. A more generalized

- 11 -

equation was derived to calculate  $\Delta$ , the amount of shift required for the right (i.e., second) perspective image from the left (i.e., first) perspective image at any particular depth relative to the width of the viewing screen, with reference to FIG. 3. The actual derivation was done using a symbolic mathematical program (Maple V). Maple is a computer algebra system, i.e., a computer program which manipulates mathematical expressions symbolically. Maple is able to solve equations, systems of equations and differential equations, perform differentiation and integration, do high precision arithmetic and draw accurate graphs in two and three dimensions. A listing of the Maple V code is listed in the Appendix which follows this specification and the resulting equation is shown below:

$$X_{old} = X_{new} \left[ \frac{S_1 - S_0}{T_1 - T_0} \right] + S_0$$

The calculation for the linear pixel interpolation is shown below:

```

Rednew[Xnew] = (1-frac(X))•Redold[integer(X)] +
                frac(X)•Redold[integer(X)+1]
Greennew[Xnew] = (1-frac(X))•Greenold[integer(X)] +
                  frac(X)•Greenold[integer(X)+1]
Bluenew[Xnew] = (1-frac(X))•Blueold[integer(X)] +
                  frac(X)•Blueold[integer(X)+1]

```

where:

$X_{old}$	-	Old pixel position.
$S_0$	-	Old left pixel boundary position.
$S_1$	-	Old right pixel boundary position.
$X_{new}$	-	New sampled pixel position.
$T_0$	-	New left pixel boundary position.
$T_1$	-	New right pixel boundary position.

- 12 -

As shown in FIG. 5, the pixels within the boundary shown in FIG. 5a are resampled to the new boundary shown in FIG. 5b. Since the number of pixels along the x axis is arbitrary, the new sampled pixels are  
5 not likely to map back to the original pixels.

For illustration purposes, consider that the left image is the original image and the right image is generated through perspective transformation. The operator will then select a neutral plane within the  
10 image. The neutral plane (also referred to as the "zero-shifted" plane) is that plane on which no point shifts between the left and right perspective image. Any point on a plane in front of the neutral plane shifts to the left and any point on a plane behind the neutral plane  
15 shifts to the right. The selection of the neutral plane is important to minimize the maximum shift required by the object. The neutral plane can be selected automatically by choosing the center plane between the front-most object and the back-most object. Manual adjustment by the  
20 operator is allowed for aesthetic reasons if the operator so chooses.

Objects in front of the neutral plane appear to float out of the viewing screen. This can produce undesirable effects due to object's partial appearance at  
25 the border of the screen. This creates an unnatural appearance as the object gets partially clipped by the border behind it instead of in front. This can be corrected by shifting the left and right frames horizontally so that the object is behind the viewing  
30 screen.

Other perspective calculation curves, such as the saturating perspective calculation curve shown in FIG.

- 13 -

6, can be used instead of the actual perspective calculation curve shown in FIG. 2. By using a modified perspective calculation curve to perform the perspective transformation, it is possible to avoid excessive image warping and distortion of the transformed image. A similar result can be achieved using the actual perspective calculation curve of FIG. 2 if the operator is prevented from setting the control points too far in front of the neutral plane.

10           Once the main outlines of the object are determined within the scene, the object can be easily transformed into the second perspective image using a perspective transformation curve. To illustrate the technique, the transformation of a simple cube is shown in  
15 FIGS. 7a and 7b. FIG. 7a shows the left perspective image. FIG. 7b shows the right perspective image which results from the transformation. In this case, the main outlines are the edges of the cube and the control points are the eight corners of the cube. The control points are  
20 manipulated and depth arranged by an operator to determine the current position in depth. This perceived depth is then horizontally translated right to create the second perspective image. The resulting stereoscopic image can be displayed in quasi-real-time on a monitor to provide  
25 feedback to the operator.

          In this example, image warping based on the vector outline transformation is performed based on the left perspective image. A new set of vectors is generated for use in the warping procedure based on the object's  
30 depth arrangement. Any vector outlined object in the background which crosses vectors with the foreground objects will be clipped around the contour of the

- 14 -

foreground object to prevent vector crossover during the warping procedure, as shown in FIG. 8. Certain vectors in the new set of vectors are allowed to crossover when the distance of the crossover is sufficiently small, thereby  
5 allowing the foreground image to fold over the background image.

Since most video media or motion picture film frames have only minute changes from one frame to the next, it is therefore possible to interpolate (i.e.,  
10 "tween") the in-between object outlines for frames between the key objects' motion frames.

When motion picture film is converted to video media, the frame rate must be converted from 24 frames per second to 30 frames per second. One common way to do this  
15 is by making every fifth video media frame the duplicate of the preceding motion picture film frame. As a way of reducing the number of frames to be processed and increasing the interpolation accuracy, such redundant frames may be removed from video media prior to monoscopic  
20 to stereoscopic conversion. Of course, the redundancy must be reintroduced to the video media after processing is complete.

Since there is latency in human visual depth perception, not every video media or motion picture frame  
25 in a sequence need be converted to a stereoscopic image. G.R. Engel, "An Investigation of Visual Responses to Brief Stereoscopic Stimuli," 22 Quarterly Journal Of Experimental Psychology, pp. 148-166 (1970). Stereoscopic images only need to be displayed about every 300  
30 milliseconds in order for the entire movie sequence to be a stereoscopic presentation which appears to be continuously stereoscopic. This reduces the computation



- 15 -

needed for the conversion of monoscopic motion picture film to stereoscopic motion picture film by several orders of magnitude and results in a much quicker and easier conversion.

5           A preferred embodiment of the method of the present invention is shown in FIGS. 9a and 9b. Digital images are captured at step 10. If the digital images are from video media and were originally recorded on motion picture film, redundant frames are removed at step 30.

10   Key objects are selected at step 40. Key frames are identified at step 50. Each frame between the start key frame and the stop key frame is tweened at step 60. Finally, the sequence of stereoscopic images is displayed at step 70. The tweening process of step 60 begins with

15   outlining the objects to form vector outlines at step 100. The depth of objects is set at step 110. If a vector outlined object in the background crosses vectors with a foreground object, the vectors of the background object are clipped at step 130. If the object corresponds to a

20   predefined object it is transformed using a predefined profile warping at step 150. Otherwise, the object is transformed using a selected perspective calculation curve at step 160. Unless a stop key frame is reached, process returns to step 100. The tweening process is repeated for

25   each set of start and stop key frames.

          Thus it can be seen that a method and apparatus for converting monoscopic images into stereoscopic images is provided. Although this specification describes the generation of a right perspective image based on a left

30   perspective image, one skilled in the art will appreciate that a left perspective image can just as easily be generated from a right perspective image. Indeed, one

- 16 -

skilled in the art will appreciate that the present invention can be practiced by other than the described embodiments, which are presented for purposes of illustration and not of limitation, and the present  
5 invention is limited only by the claims which follow.

- 17 -

WHAT IS CLAIMED IS:

1           1.     A method for converting a monoscopic image  
2 comprising a first perspective to a stereoscopic image  
3 comprising said first perspective and a second  
4 perspective, comprising the steps of:  
5                 identifying at least one object in said  
6 monoscopic image;  
7                 outlining said at least one object to  
8 generate an outline;  
9                 endowing said at least one object with  
10 depth information; and  
11                 generating said second perspective by  
12 image warping said at least one object.

1           2.     The method of claim 1 wherein said  
2 generating step comprises:  
3                 shifting points on said outline of said at  
4 least one object from said first perspective to said  
5 second perspective; and  
6                 shifting points within said outline from  
7 said first perspective to said second perspective.

1           3.     The method of claim 1 wherein said  
2 generating step is performed on a sequence of successive  
3 frames of said monoscopic images to produce a stereoscopic  
4 presentation.

1           4.     The method of claim 3 wherein said  
2 sequence of successive frames is derived from motion  
3 picture film.

- 18 -

1           5.     The method of claim 3 wherein said  
2 sequence of successive frames is derived from video media.

1           6.     The method of claim 5 wherein said  
2 sequence of successive frames contains redundant frames as  
3 a result of conversion from motion picture film.

1           7.     The method of claim 6 further comprising a  
2 preliminary step of:  
3                 removing said redundant frames from said  
4                 sequence of successive frames.

1           8.     The method of claim 3 wherein said method  
2 is performed only on selected frames of said sequence of  
3 successive frames, thereby reducing the number of frames  
4 that must be converted to stereoscopic images, thereby  
5 reducing computation time while providing a sequence of  
6 images which appear to be stereoscopic.

1           9.     A method for converting a sequence of  
2 frames of monoscopic images with at least one foreground  
3 object with a depth and an outline and at least one  
4 background object with an outline to a sequence of  
5 stereoscopic images, comprising the steps of:  
6                 identifying said at least one foreground  
7                 object;  
8                 outlining said at least one foreground  
9                 object;  
10                setting said depth of said at least one  
11                foreground object;

- 19 -

12 line clipping said at least one background  
13 object if said at least one foreground object moves  
14 in front of said at least one background object;  
15 shifting points of said outline of said at  
16 least one foreground object and said outline of said  
17 at least one background object to a second image  
18 perspective; and  
19 shifting points inside said outline of  
20 said at least one foreground object and said outline  
21 of said at least one background object to a second  
22 image perspective.

1 10. The method of claim 9 wherein said depth  
2 in said setting step may be varied in response to  
3 instructions from an operator.

1 11. The method of claim 9 further comprising  
2 the step of displaying said sequence of stereoscopic  
3 images in near real-time.

1 12. The method of claim 9 wherein said  
2 sequence of successive frames is derived from motion  
3 picture film.

1 13. The method of claim 9 wherein said  
2 sequence of successive frames is derived from video media.

1 14. The method of claim 13 wherein said  
2 sequence of successive frames contains redundant frames as  
3 a result of conversion from motion picture film.

- 20 -

1           15. The method of claim 14 further comprising  
2 a preliminary step of:  
3           removing said redundant frames from said  
4           sequence of successive frames.

1           16. The method of claim 9 wherein said method  
2 is performed only on selected frames of said sequence of  
3 successive frames, thereby reducing the number of frames  
4 that must be converted to stereoscopic images, thereby  
5 reducing computation time while providing a sequence of  
6 images which appear to be stereoscopic.

1           17. The method of claim 16 wherein said  
2 selected frames are separated by a set interval of time.

1           18. The method of claim 17 wherein said set  
2 interval is about 300 milliseconds.

1           19. The method of claim 9 further comprising a  
2 step before said identifying step of:  
3           determining a start key frame and a stop  
4           key frame.

1           20. The method of claim 19 wherein said  
2 shifting points of said outline step and said shifting  
3 points inside said outline step are repeated for each  
4 frame between said start key frame and said stop key  
5 frame.

1           21. The method of claim 19, wherein said  
2 shifting points of said outline step and said shifting

- 21 -

3 points inside said outline step are done via non-linear  
4 interpolation.

1           22. The method of claim 20 wherein said  
2 shifting points of said outline step and said shifting  
3 points inside said outline step are done via linear  
4 interpolation.

1           23. The method of claim 9 wherein said  
2 shifting points of said outline step and said shifting  
3 points inside said outline step are done based on said  
4 depth of said at least one foreground object and a  
5 selected perspective calculation curve.

1           24. The method of claim 23 wherein said  
2 selected perspective calculation curve is an actual  
3 perspective calculation curve.

1           25. The method of claim 23 wherein an operator  
2 is prevented from setting said depth of said at least one  
3 foreground object significantly beyond a neutral plane.

1           26. The method of claim 23 wherein said  
2 selected perspective calculation curve is a modified  
3 perspective calculation curve.

1           27. The method of claim 26 wherein said  
2 modified perspective calculation curve is a saturating  
3 perspective calculation curve.

1           28. A method for converting a monoscopic image  
2 comprising a first perspective to a stereoscopic image

- 22 -

3 comprising said first perspective and a second  
4 perspective, comprising the steps of:  
5 identifying at least one object in said  
6 monoscopic image;  
7 outlining said at least one object;  
8 endowing said at least one object with  
9 depth information; and  
10 generating said second perspective by a  
11 method selected from a horizontal shift method, a  
12 frame delay method and an image warping method, based  
13 on direction of motion of camera and said at least  
14 one object, desired computation complexity and  
15 desired image quality.

1 29. A recording medium on which a stereoscopic  
2 image comprising a first perspective and a second  
3 perspective is recorded, said stereoscopic image being  
4 formed from a monoscopic image comprising said first  
5 perspective by a method comprising the steps of:  
6 identifying at least one object in said  
7 monoscopic image;  
8 outlining said at least one object;  
9 endowing said at least one object with  
10 depth information; and  
11 generating said second perspective by  
12 image warping said at least one object.

1 30. A product produced by placing on a  
2 recording medium a stereoscopic image generated by the  
3 method of claims 1, 9 or 28.



- 23 -

1           31. An apparatus for converting a sequence of  
2 frames of monoscopic images with at least one foreground  
3 object with a depth and at least one background object to  
4 a sequence of stereoscopic images, comprising:  
5           a foreground object identifier;  
6           a foreground object outliner;  
7           a foreground object depth setter;  
8           a background object line clipper; and  
9           a foreground object point shifter  
10 coupled in series.

1           32. The apparatus of claim 31 wherein said  
2 sequence of successive frames is derived from motion  
3 picture film.

1           33. The apparatus of claim 31 wherein said  
2 sequence of successive frames is derived from video media.

1           34. The apparatus of claim 33 wherein said  
2 sequence of successive frames contains redundant frames as  
3 a result of conversion from motion picture film.

1           35. The apparatus of claim 34 further  
2 comprising a redundant frame remover coupled in series  
3 before said foreground object identifier.

1           36. The apparatus of claim 31 wherein said  
2 apparatus operates only on selected frames of said  
3 monoscopic images, thereby reducing the number of frames  
4 that must be converted to stereoscopic images, thereby  
5 reducing computation time while providing a sequence of  
6 images which appear to be stereoscopic.

- 24 -

1           37. The apparatus of claim 36 wherein said  
2 selected frames are separated by a set interval of time.

1           38. The apparatus of claim 37 wherein said set  
2 interval is about 300 milliseconds.

1           39. The apparatus of claim 31 wherein said  
2 foreground object point shifter shifts points based on  
3 said depth of said at least one foreground object and a  
4 selected perspective calculation curve.

1           40. The apparatus of claim 39 wherein said  
2 selected perspective calculation curve is an actual  
3 perspective calculation curve.

1           41. The apparatus of claim 39 wherein an  
2 operator is prevented from setting said depth of said at  
3 least one foreground object significantly beyond a neutral  
4 plane.

1           42. The apparatus of claim 39 wherein said  
2 selected perspective calculation curve is a modified  
3 perspective calculation curve.

1           43. The apparatus of claim 42 wherein said  
2 modified perspective calculation curve is a saturating  
3 perspective calculation curve.

1           44. The apparatus of claim 31 wherein said  
2 depth in said setting step may be varied in response to  
3 instructions from an operator.

- 25 -

1                   45. The apparatus of claim 44 wherein said  
2 sequence of stereoscopic images is displayed in near real-  
3 time.

1/10

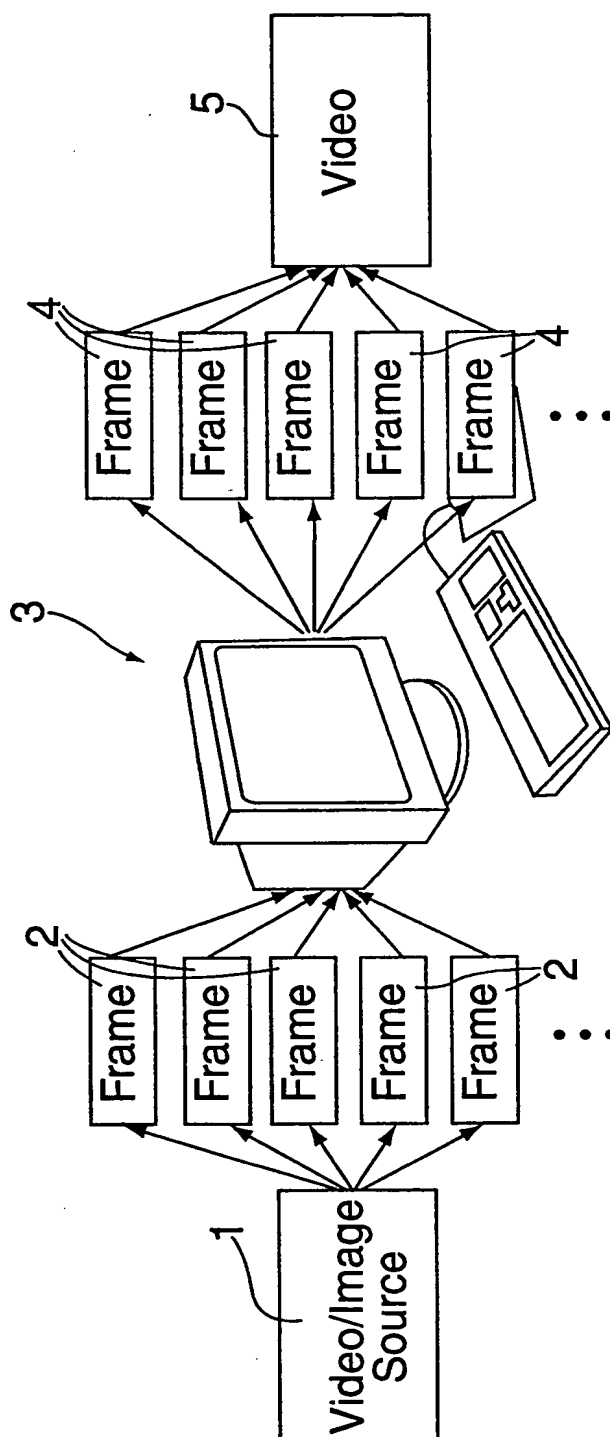


FIG. 1

2/10

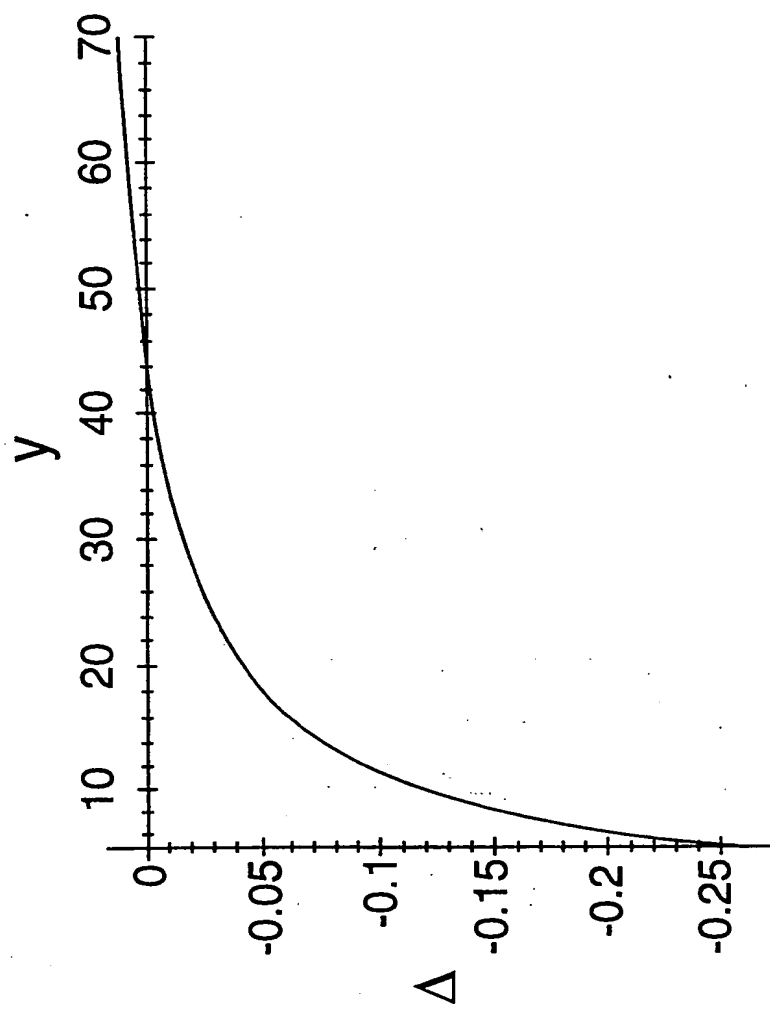


FIG. 2

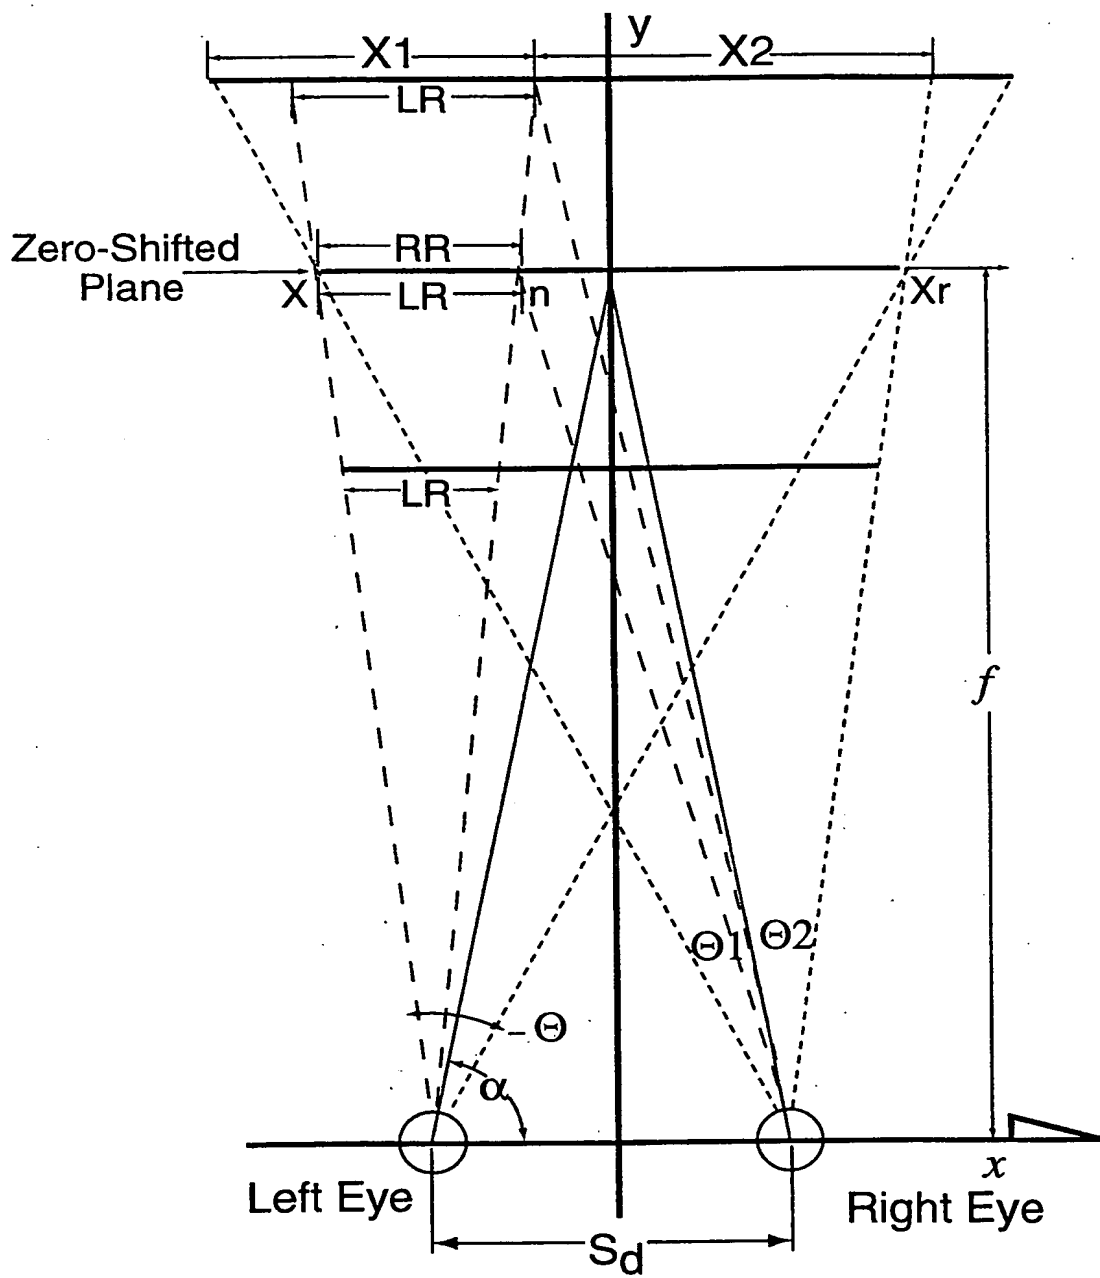


FIG. 3

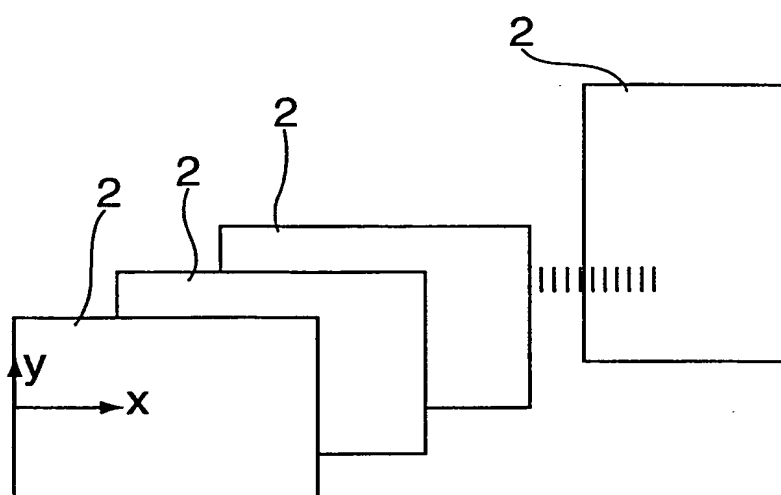


FIG. 4

5/10

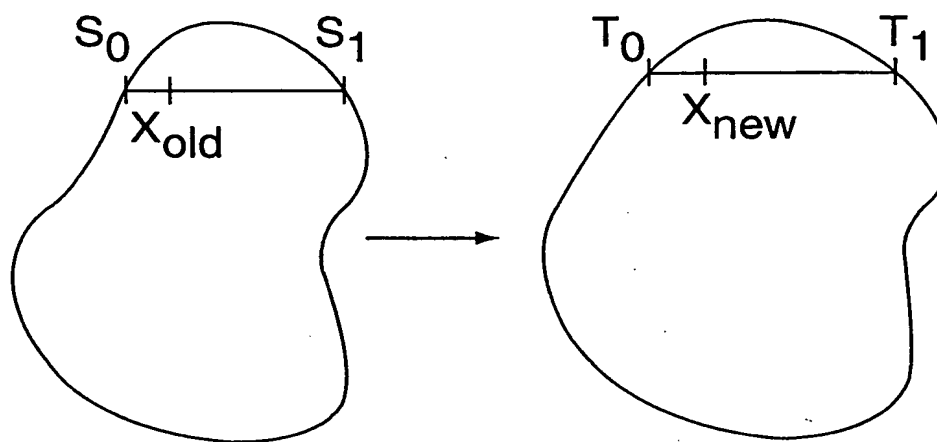


FIG. 5a

FIG. 5b



6/10

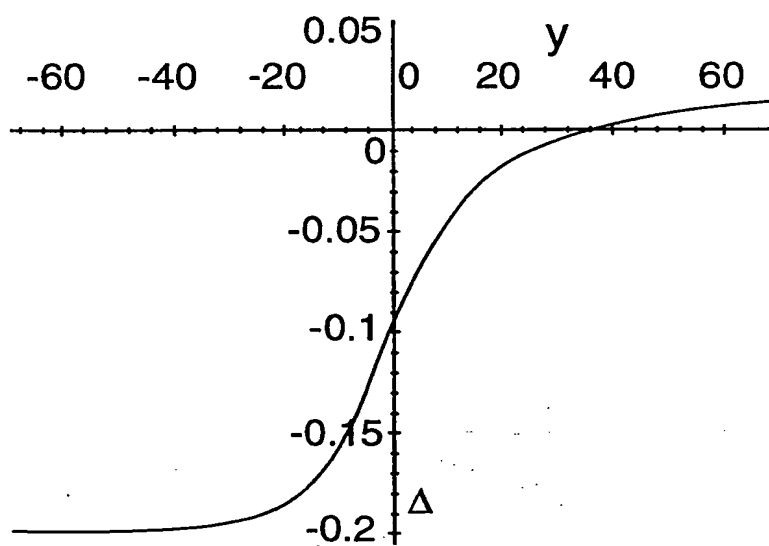


FIG. 6

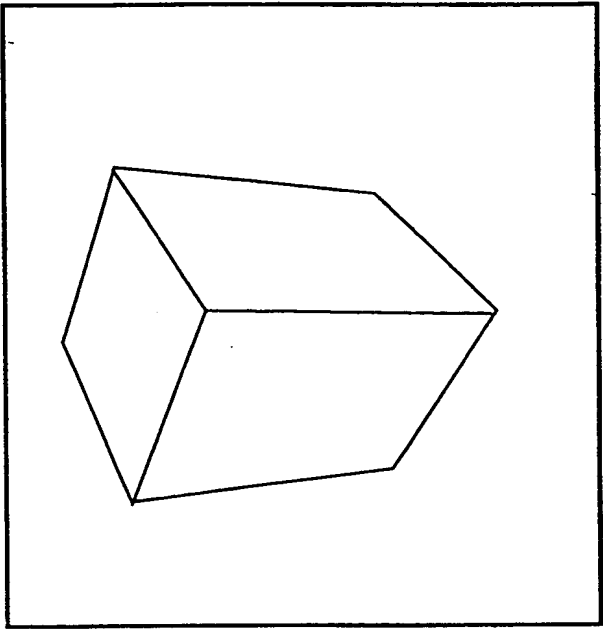


FIG. 7b




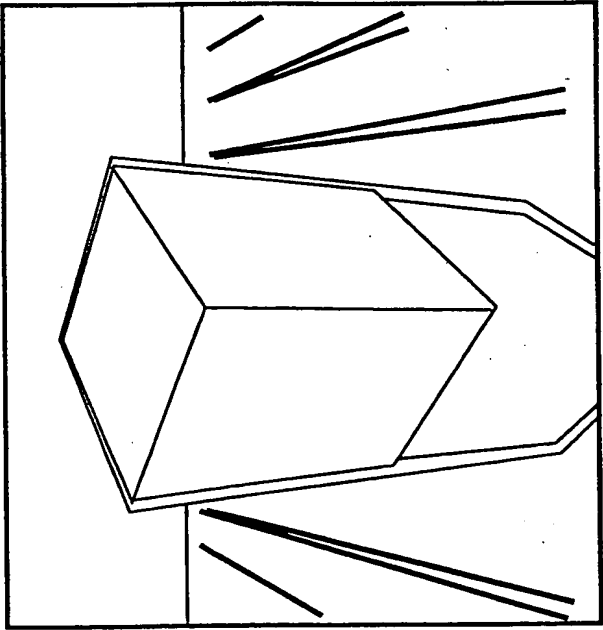


FIG. 7a

8/10

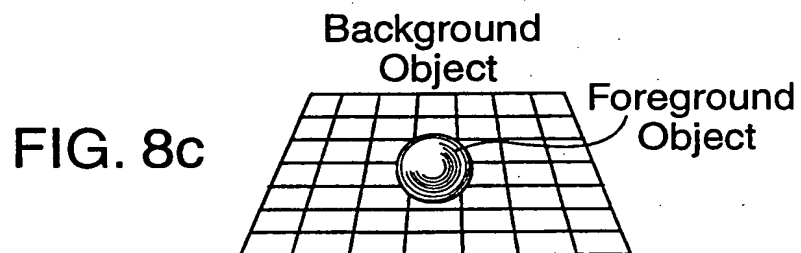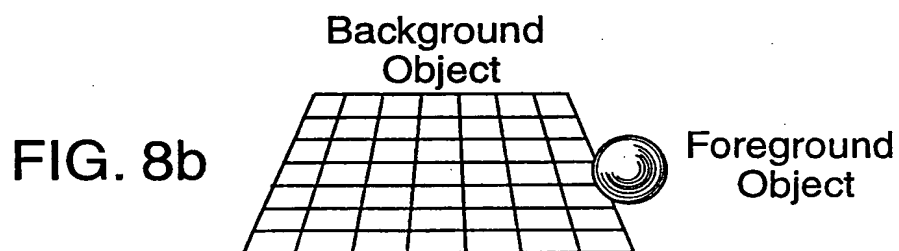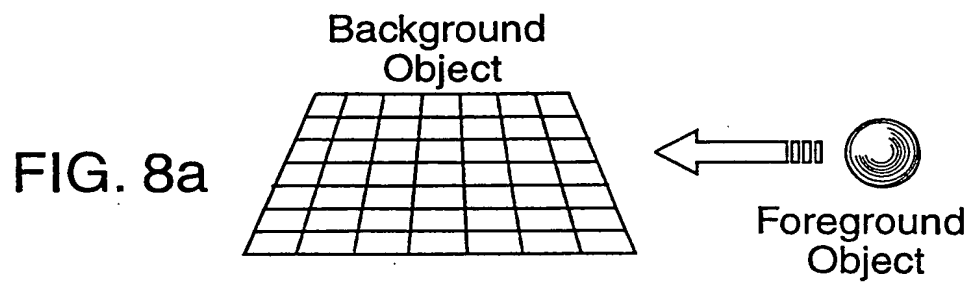

9/10

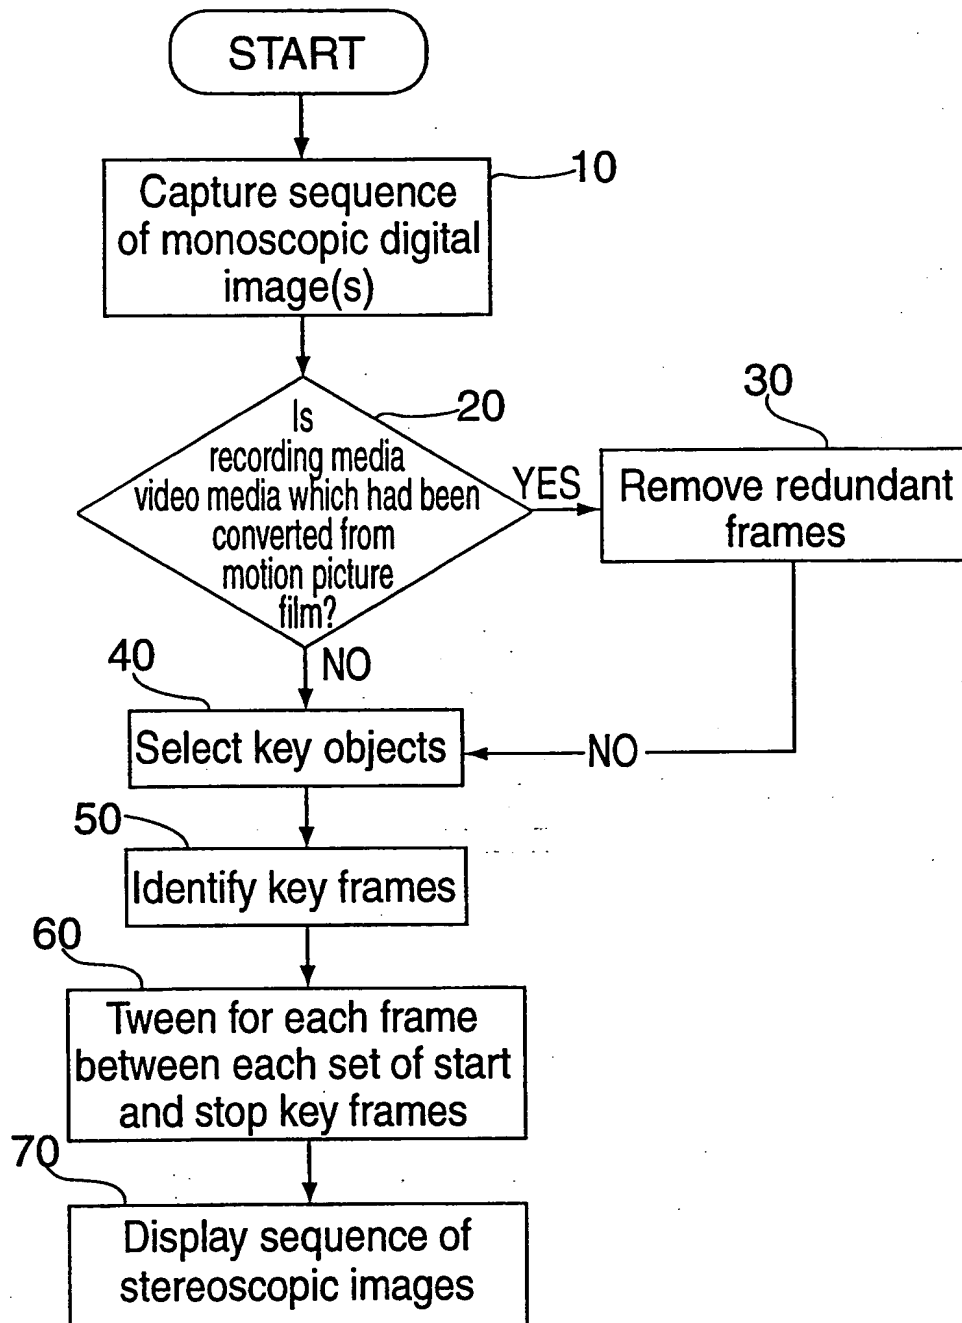


FIG. 9a

10/10

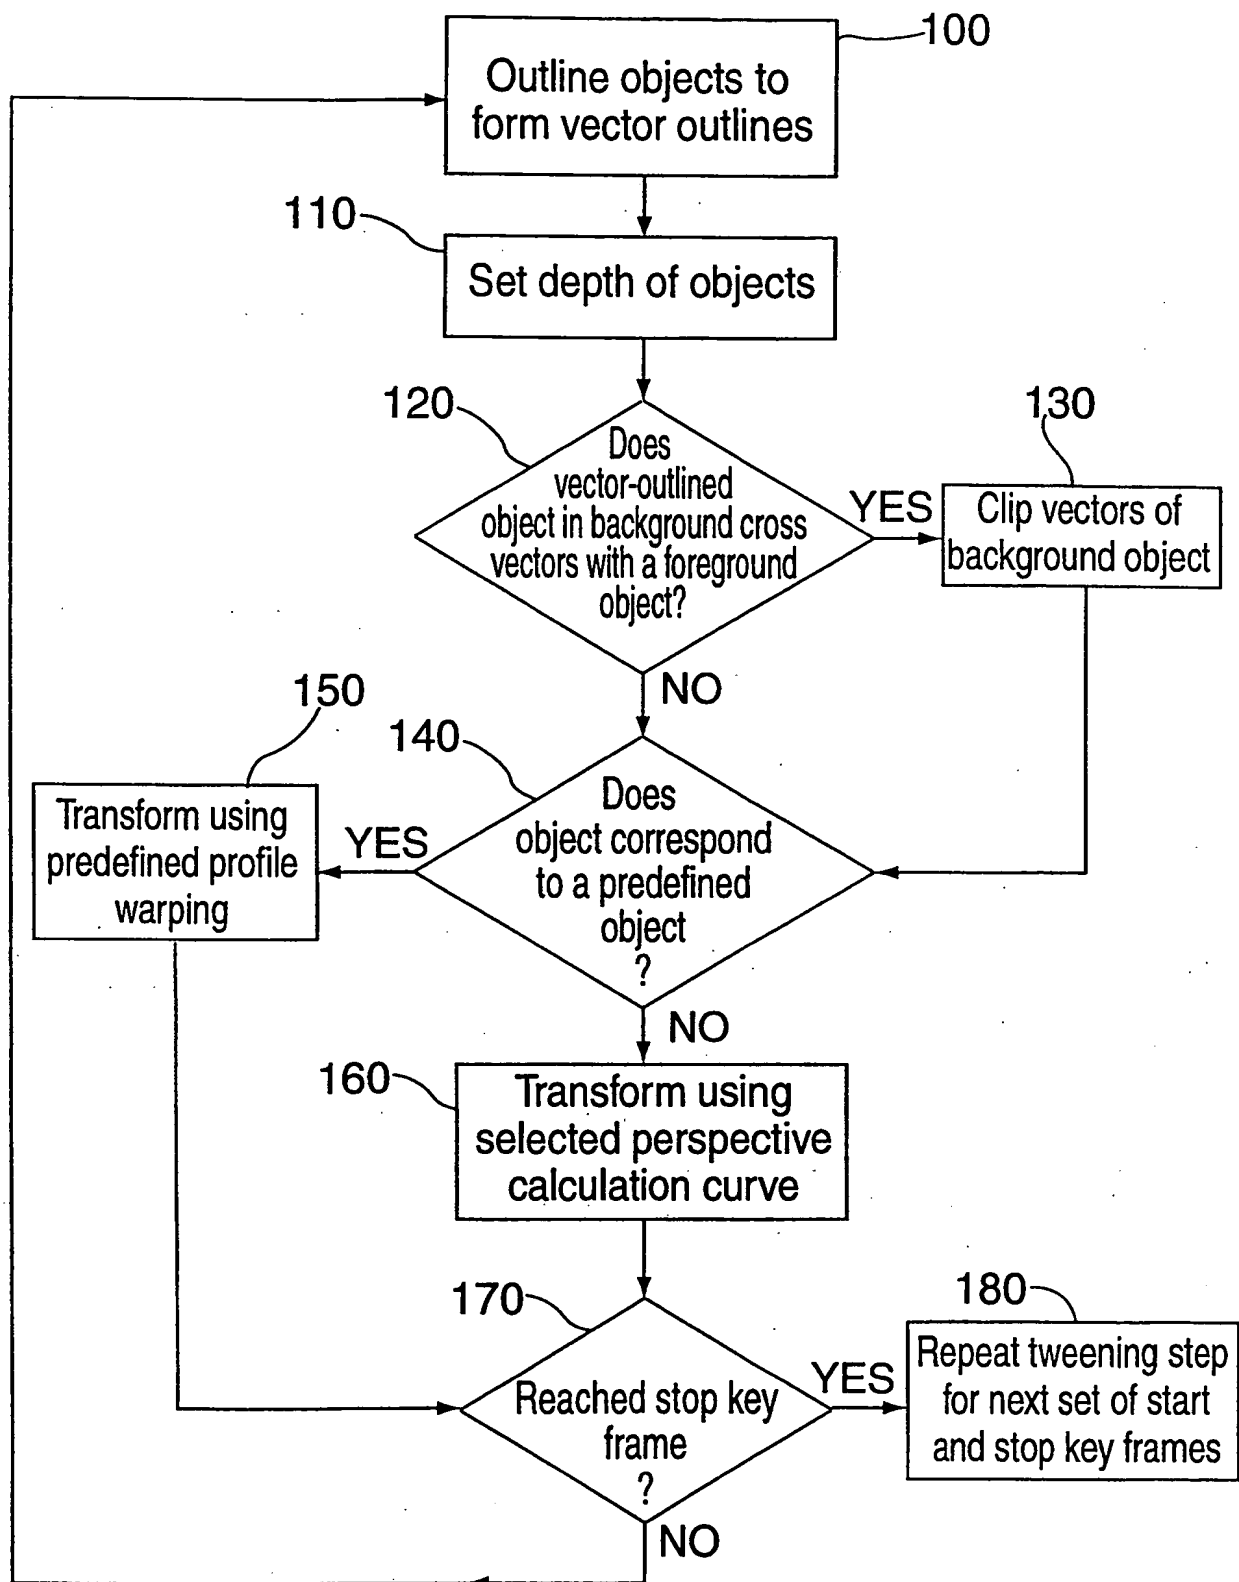


FIG. 9b

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/12119

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 G06T15/10

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 G06T

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, Y	US 5 748 199 A (PALM CHARLES S) 5 May 1998  see column 13, line 26 - column 15, line 19; figures 63-66 ---	1-5, 9-13, 28-33
A	US 4 925 294 A (GESHWIND DAVID M ET AL) 15 May 1990 ---	
Y	US 5 510 832 A (GARCIA BAXTER J) 23 April 1996  see claim 1 ---	1-5, 9-13, 28-33
P, A	EP 0 798 666 A (SONY CORP) 1 October 1997 see column 1, line 3 - line 55; figure 6 ---	1-45
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

7 October 1998

Date of mailing of the international search report

14/10/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Perez Molina, E

# INTERNATIONAL SEARCH REPORT

Int. Application No

PCT/US 98/12119

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>EP 0 735 512 A (SANYO ELECTRIC CO)  2 October 1996  see abstract  see page 23, line 16 - page 24, line 43;  figures 29,30</p> <p>-----</p>	<p>9-13,  29-33</p>

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/12119

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 5748199	A	05-05-1998	AU	1463597 A	14-07-1997
			WO	9722951 A	26-06-1997
US 4925294	A	15-05-1990	AU	1085788 A	15-07-1988
			EP	0442865 A	28-08-1991
			JP	4504333 T	30-07-1992
			WO	8804804 A	30-06-1988
US 5510832	A	23-04-1996	AU	683336 B	06-11-1997
			AU	1290495 A	19-06-1995
			CA	2177051 A	08-06-1995
			EP	0746949 A	11-12-1996
			JP	9508765 T	02-09-1997
			WO	9515661 A	08-06-1995
EP 0798666	A	01-10-1997	JP	5089253 A	09-04-1993
			EP	0535879 A	07-04-1993
			US	5502798 A	26-03-1996
EP 0735512	A	02-10-1996	JP	9081746 A	28-03-1997
			JP	8331607 A	13-12-1996